
Cyber-Physical Systems

Modeling Physical Dynamics



UNIVERSITY
AT ALBANY
State University of New York

ICEN 553/453 – Fall 2018




Prof. Dola Saha

Modeling Techniques


- Models that are abstractions of **system dynamics** (how system behavior changes over time)
 - Modeling physical phenomena – differential equations
 - Feedback control systems – time-domain modeling
 - Modeling modal behavior – FSMs, hybrid automata, ...
 - Modeling sensors and actuators – calibration, noise, ...
 - Hardware and software – concurrency, timing, power, ...
 - Networks – latencies, error rates, packet losses, ...

Modeling of Continuous Dynamics

- Ordinary differential equations, Laplace transforms, feedback control models, ...

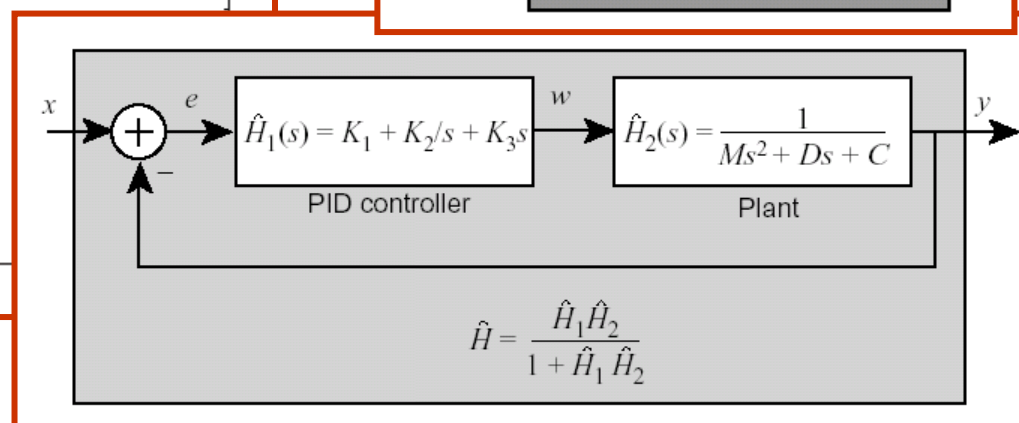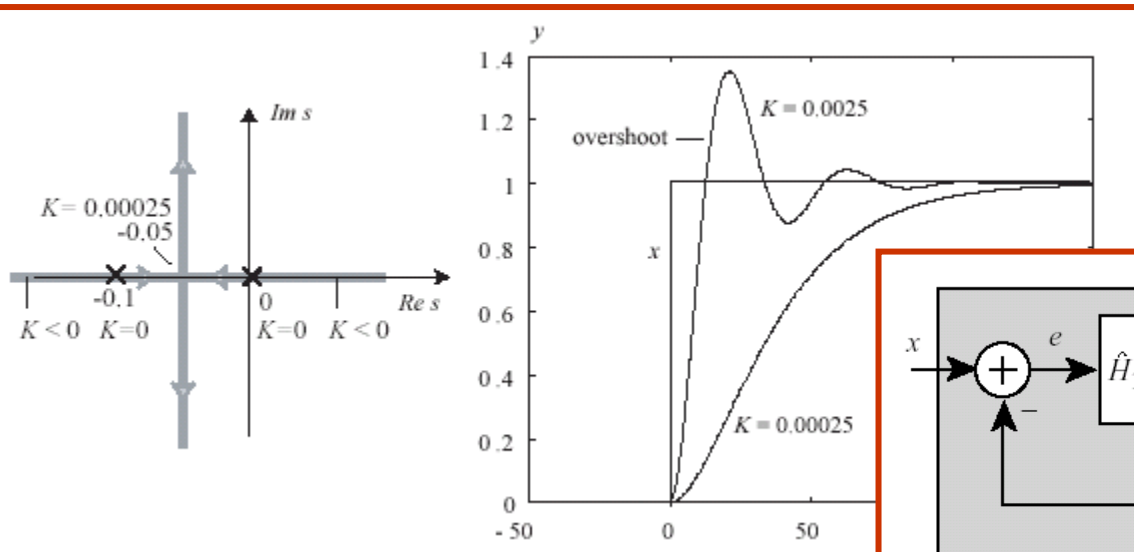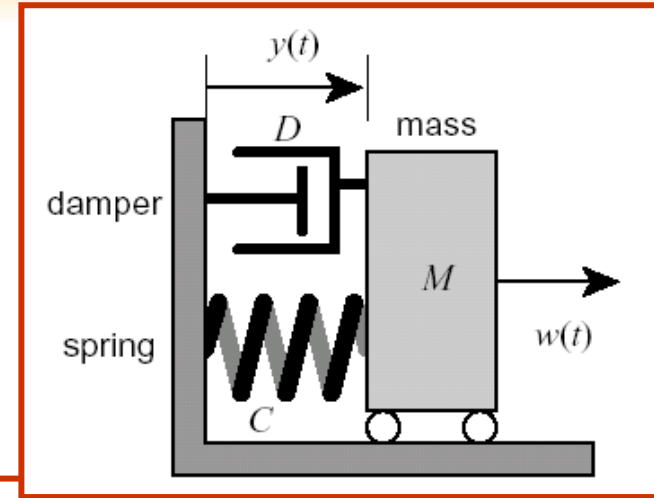

Example CPS System: Helicopter Dynamics

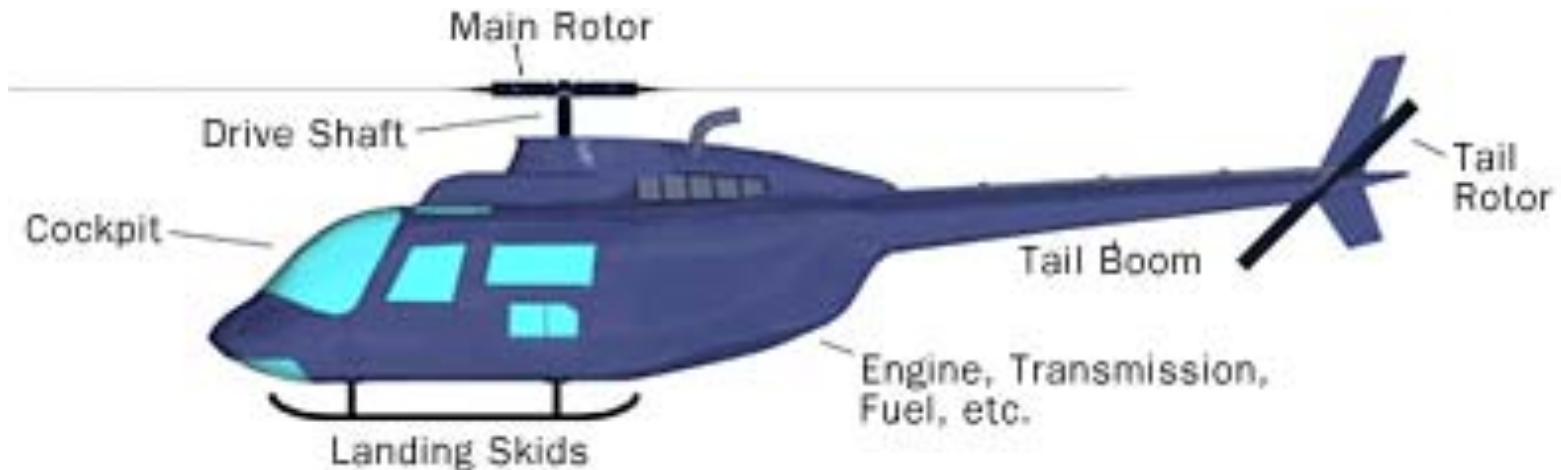


The Fundamental Parts of any Helicopter

©2000 HowStuffWorks

Modeling Physical Motion

➤ Six Degrees of Freedom

- Position: x, y, z
- Orientation: pitch, yaw, roll

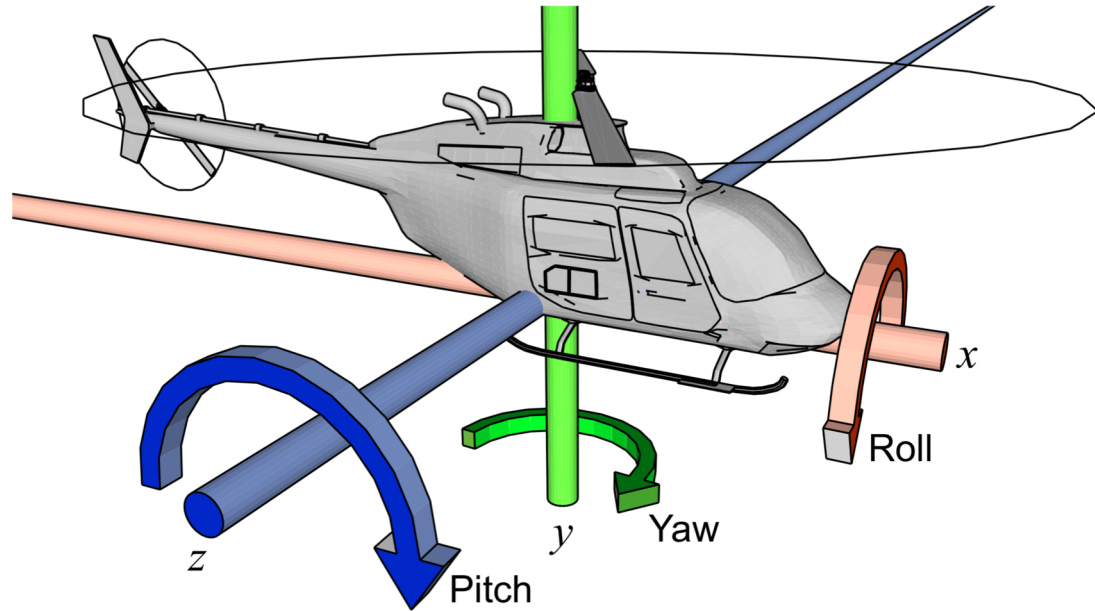

Notation

Position is given by three functions:

$$x: \mathbb{R} \rightarrow \mathbb{R}$$

$$y: \mathbb{R} \rightarrow \mathbb{R}$$

$$z: \mathbb{R} \rightarrow \mathbb{R}$$

where the domain \mathbb{R} represents time and the co-domain (range) \mathbb{R} represents position along the axis. Collecting into a vector:

$$\mathbf{x}: \mathbb{R} \rightarrow \mathbb{R}^3$$

Position at time $t \in \mathbb{R}$ is $\mathbf{x}(t) \in \mathbb{R}^3$.

Notation

Velocity

$$\dot{\mathbf{x}}: \mathbb{R} \rightarrow \mathbb{R}^3$$

is the derivative, $\forall t \in \mathbb{R}$,

$$\dot{\mathbf{x}}(t) = \frac{d}{dt}\mathbf{x}(t)$$

Acceleration $\ddot{\mathbf{x}}: \mathbb{R} \rightarrow \mathbb{R}^3$ is the second derivative,

$$\ddot{\mathbf{x}} = \frac{d^2}{dt^2}\mathbf{x}$$

Force on an object is $\mathbf{F}: \mathbb{R} \rightarrow \mathbb{R}^3$.

Newton's Second Law

Newton's second law states $\forall t \in \mathbb{R}$,


$$\mathbf{F}(t) = M\ddot{\mathbf{x}}(t)$$

where M is the mass. To account for initial position and velocity, convert this to an integral equation

$$\begin{aligned}\mathbf{x}(t) &= \mathbf{x}(0) + \int_0^t \dot{\mathbf{x}}(\tau) d\tau \\ &= \mathbf{x}(0) + t\dot{\mathbf{x}}(0) + \frac{1}{M} \int_0^t \int_0^\tau \mathbf{F}(\alpha) d\alpha d\tau,\end{aligned}$$

Orientation

- Orientation: $\theta: \mathbb{R} \rightarrow \mathbb{R}^3$
- Angular velocity: $\dot{\theta}: \mathbb{R} \rightarrow \mathbb{R}^3$
- Angular acceleration: $\ddot{\theta}: \mathbb{R} \rightarrow \mathbb{R}^3$
- Torque: $\mathbf{T}: \mathbb{R} \rightarrow \mathbb{R}^3$

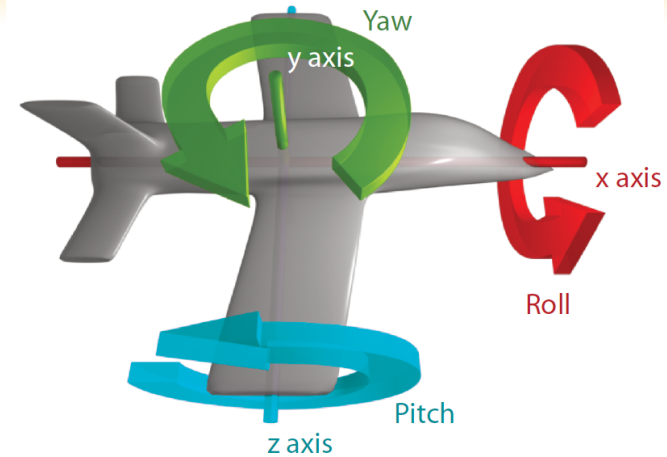

$$\theta(t) = \begin{bmatrix} \dot{\theta}_x(t) \\ \dot{\theta}_y(t) \\ \dot{\theta}_z(t) \end{bmatrix} = \begin{bmatrix} \text{roll} \\ \text{yaw} \\ \text{pitch} \end{bmatrix}$$


Torque: Angular version of Force

- radius of the arm: $r \in \mathbb{R}$
- force orthogonal to arm: $f \in \mathbb{R}$
- mass of the object: $m \in \mathbb{R}$

Just as force is a push or a pull, a torque is a twist.
Units: newton-meters/radian, Joules/radian

$$T_y(t) = r f(t)$$

angular momentum, momentum

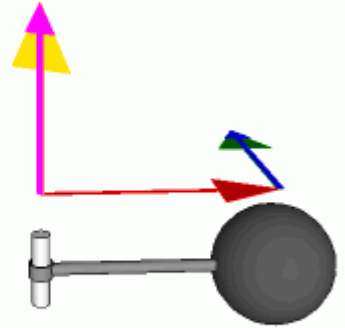

Rotational Version of Newton's Law

$$\mathbf{T}(t) = \frac{d}{dt} \left(I(t) \dot{\theta}(t) \right),$$

where $I(t)$ is a 3×3 matrix called the moment of inertia tensor.


$$\begin{bmatrix} T_x(t) \\ T_y(t) \\ T_z(t) \end{bmatrix} = \frac{d}{dt} \left(\begin{bmatrix} I_{xx}(t) & I_{xy}(t) & I_{xz}(t) \\ I_{yx}(t) & I_{yy}(t) & I_{yz}(t) \\ I_{zx}(t) & I_{zy}(t) & I_{zz}(t) \end{bmatrix} \begin{bmatrix} \dot{\theta}_x(t) \\ \dot{\theta}_y(t) \\ \dot{\theta}_z(t) \end{bmatrix} \right)$$

Here, for example, $T_y(t)$ is the net torque around the y axis (which would cause changes in yaw), $I_{yx}(t)$ is the inertia that determines how acceleration around the x axis is related to torque around the y axis.

Feedback Control Problem

A helicopter without a tail rotor, like the one below, will spin uncontrollably due to the torque induced by friction in the rotor shaft.

Control system problem: Apply torque using the tail rotor to counterbalance the torque of the top rotor.

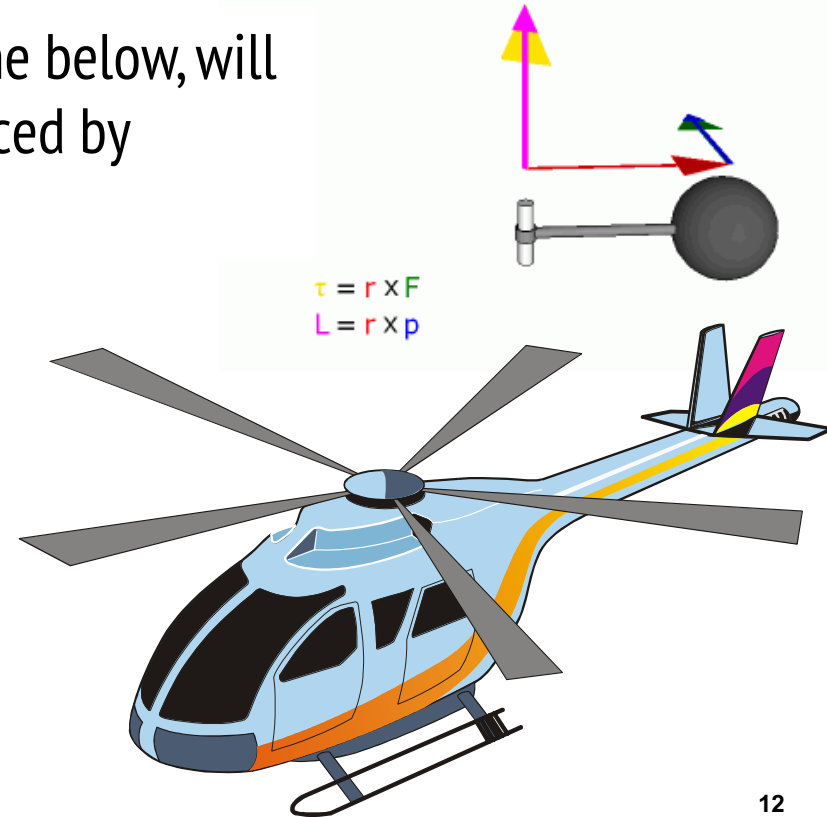

Simplified Model

Yaw dynamics:

$$T_y(t) = I_{yy}\ddot{\theta}_y(t)$$

To account for initial angular velocity, write as


$$\dot{\theta}_y(t) = \dot{\theta}_y(0) + \frac{1}{I_{yy}} \int_0^t T_y(\tau) d\tau.$$

Actor Model

- Mathematical Model of Concurrent Computation
- Actor is an unit of computation
- Actors can
 - Create more actors
 - Send messages to other actors
 - Designate what to do with the next message
- Multiple actors may execute at the same time

Actor Model of Systems

- A *system* is a function that accepts an input *signal* and yields an output signal.
- The domain and range of the system function are sets of signals, which themselves are functions.
- Parameters may affect the definition of the function S .

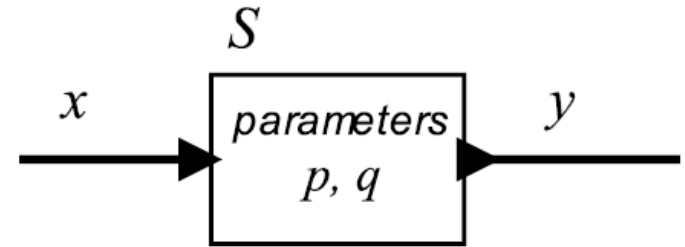


$$x: \mathbb{R} \rightarrow \mathbb{R}, \quad y: \mathbb{R} \rightarrow \mathbb{R}$$

$$S: X \rightarrow Y$$

$$X = Y = (\mathbb{R} \rightarrow \mathbb{R})$$


Actor Model of the Helicopter

- Input is the net torque of the tail rotor and the top rotor. Output is the angular velocity around the y-axis.
- Parameters of the model are shown in the box. The input and output relation is given by the equation to the right.

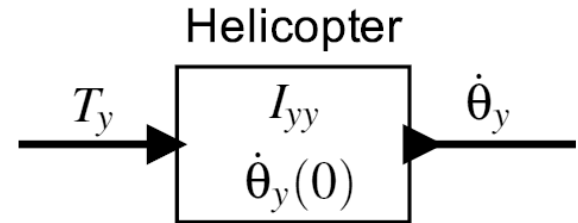

$$\dot{\theta}_y(t) = \dot{\theta}_y(0) + \frac{1}{I_{yy}} \int_0^t T_y(\tau) d\tau$$

Composition of Actor Model

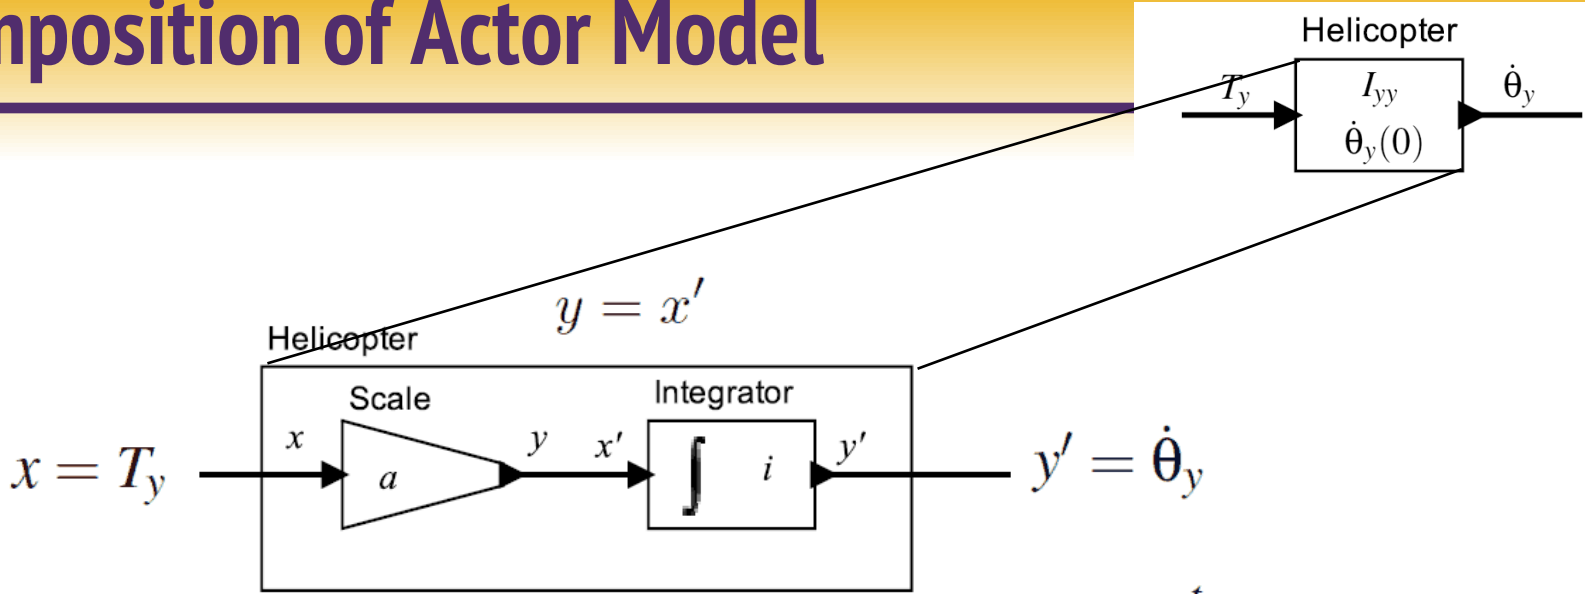

$$y = x'$$

$$x = T_y$$

$$y' = \dot{\theta}_y$$

$$\forall t \in \mathbb{R}, \quad y(t) = ax(t)$$


$$y'(t) = i + \int_0^t x'(\tau) d\tau$$

$$y = ax$$


$$i = \dot{\theta}_y(0)$$

$$a = 1/I_{yy}$$


Actor Models with Multiple Inputs

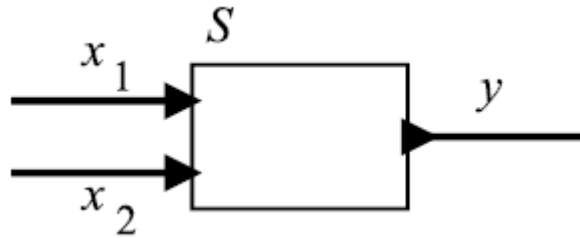

$$S: (\mathbb{R} \rightarrow \mathbb{R})^2 \rightarrow (\mathbb{R} \rightarrow \mathbb{R})$$

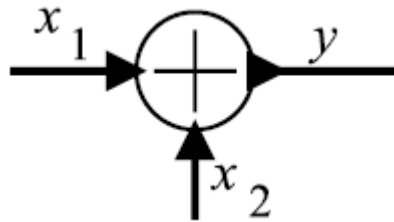

$$\forall t \in \mathbb{R}, \quad y(t) = x_1(t) + x_2(t)$$

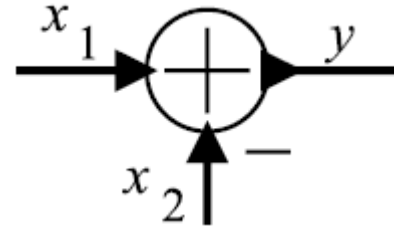

$$(S(x_1, x_2))(t) = y(t) = x_1(t) - x_2(t)$$

Modern Actor Based Platforms

- Simulink (The MathWorks)
- Labview (National Instruments)
- Modelica (Linkoping)
- OPNET (Opnet Technologies)
- Polis & Metropolis (UC Berkeley)
- Gabriel, Ptolemy, and Ptolemy II (UC Berkeley)
- OCP, open control platform (Boeing)
- GME, actor-oriented meta-modeling (Vanderbilt)
- SPW, signal processing worksystem (Cadence)
- System studio (Synopsys)
- ROOM, real-time object-oriented modeling (Rational)
- Easy5 (Boeing)
- Port-based objects (U of Maryland)
- I/O automata (MIT)
- VHDL, Verilog, SystemC (Various)

Example LabVIEW Screenshot

